


LED GLOBE- 28W

Dimensions

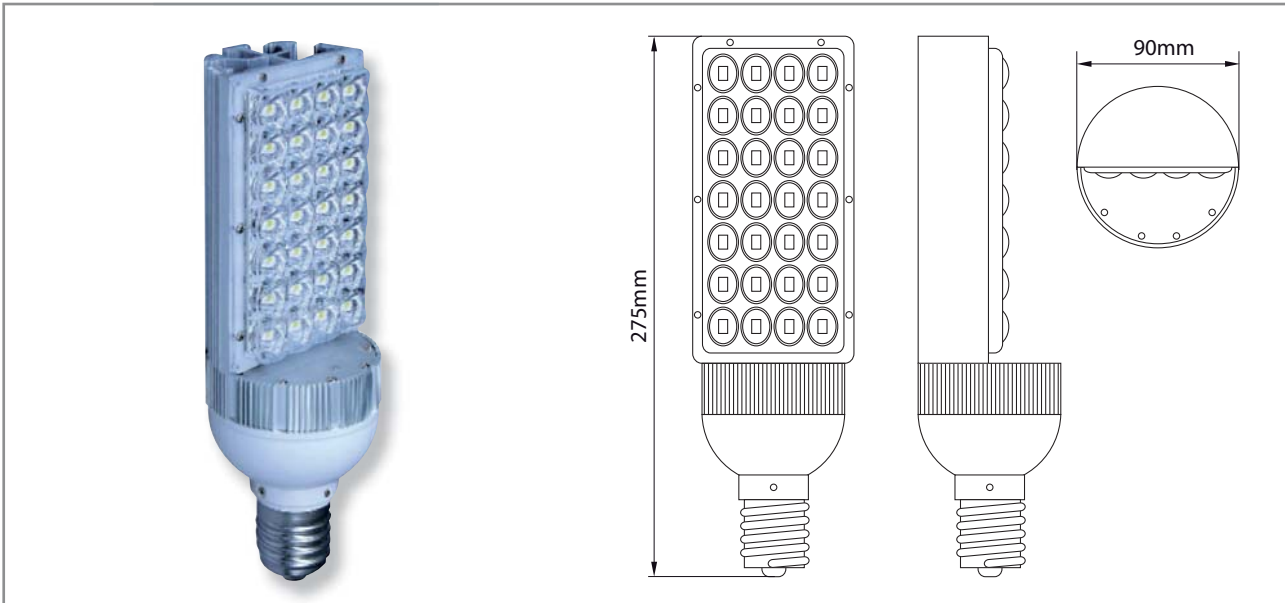

Specifications

PART NO.	INPUT VOLTAGE (V)	POWER CONSUMPTION	COLOUR TEMP. (K)	SIZE mm	BASE	CRI	BEAM ANGLE	ILLUMINANCE @ 8M (Lux)	LUMINOUS FLUX (Lm)
LEDG28WDLE40	85-265 VAC	28W	5000	90 x 275	E40	75	120°	7.5	2300
LEDG28WCWE40	85-265 VAC	28W	3800	90 x 275	E40	75	120°	6.5	2100

- Working Temperature: -5°C ~ +40°C
- Housing Construction: Aluminium & polycarbonate
- Manufacturer's Rated Life*: 50,000hrs
- SMD Manufacturer: Cree
- Power Factor: 0.92
- Luminous Efficiency: 80lm/w

- LED Efficiency: 100% light output for 80% of the rated life
- Frequency: 50-60Hz
- Input Voltage: 85 ~ 265 VAC
- IP Rating: IP66
- Weight: 1kg
- Warranty: 2 years product only

- Lux Levels: 6m @ 13lux
8m @ 7.5lux
10m @ 4.5lux
12m @ 3lux

Usage

MARKETS	Residential	Commercial	Industrial	Public	Specialty	Other
		✓	✓	✓		
REPLACEMENT FOR [†]	50w mercury vapour					
IDEAL FOR	Any street light up to 50w with E40 lampholder					

