


LED LOWBAY- 120W

Dimensions

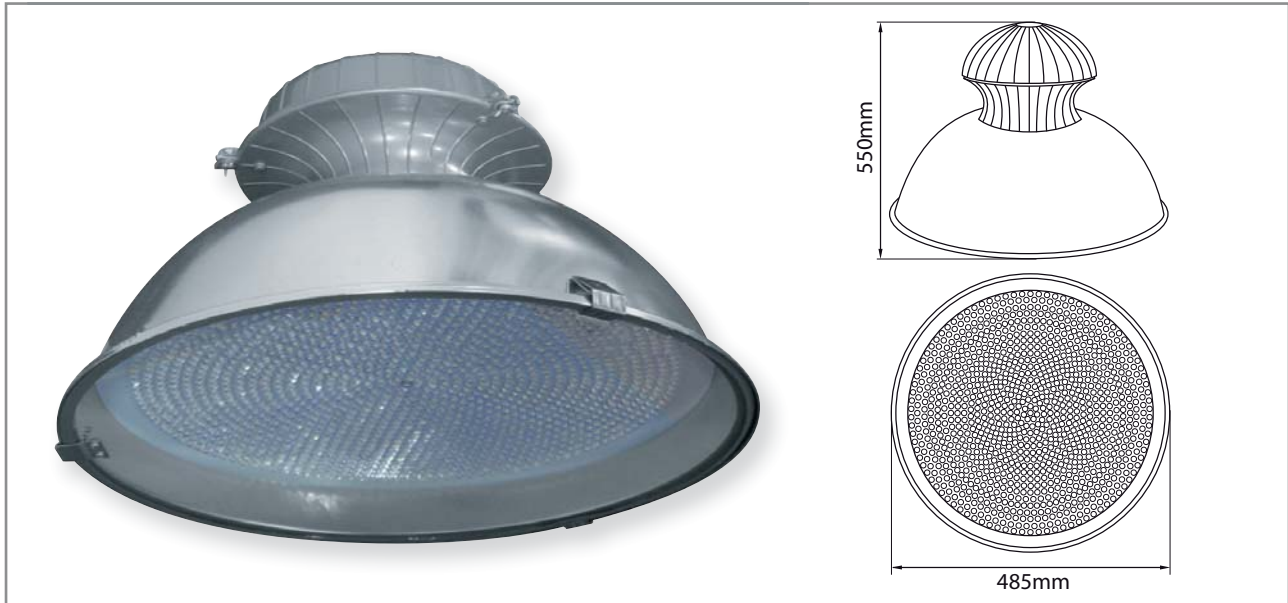


Specifications

PART NO.	INPUT VOLTAGE (V)	POWER CONSUMPTION	COLOUR TEMP. (K)	SIZE mm	BASE	CRI	BEAM ANGLE	ILLUMINANCE @ 8M (Lux)	LUMINOUS FLUX (Lm)
LEDLB120WDL	90-240 VAC	120W	6000	440 x 320	N/A	80-85	120°	N/A	9600
LEDLB120WCW	90-240 VAC	120W	3800	440 x 320	N/A	80-85	120°	N/A	8400

- Working Temperature: -35°C ~ +40°C
- Housing Construction: Aluminium & polycarbonate
- Manufacturer's Rated Life*: 40,000hrs
- SMD Manufacturer: Cree
- Power Factor: 0.92
- Luminous Efficacy: 80lm/w & 70lm/w
- LED Efficiency: 100% light output for 80% of the rated life
- Frequency: 50-60Hz
- Input Voltage: 90 ~ 240 VAC
- IP Rating: IP65
- Weight: 7.4kg
- Warranty: 2 years product only

Usage

MARKETS	Residential	Commercial	Industrial	Public	Specialty	Other
		✓	✓			
REPLACEMENT FOR†	120w metal halide					
IDEAL FOR	Warehouses and showrooms with ceiling heights of up to 5m					

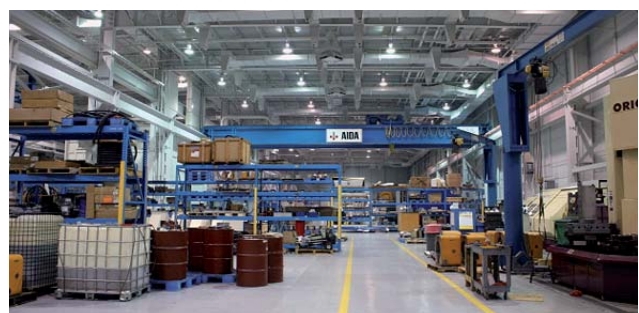

†Replacement recommendation is a guide only, the buyer must review the lumens, lux levels and the available photometric data in conjunction with the optics of the fitting being replaced by a LED globe before purchasing any product. *Life expectancy is manufacturer's estimate only.